

Telit GE864 and GC864 Product Description

80273ST10008a Rev. 18 - 2010-06-03



DISCLAIMER

The information contained in this document is the proprietary information of Telit Communications S.p.A. and its affiliates ("TELIT").

The contents are confidential and any disclosure to persons other than the officers, employees, agents or subcontractors of the owner or licensee of this document, without the prior written consent of Telit, is strictly prohibited.

Telit makes every effort to ensure the quality of the information it makes available. Notwithstanding the foregoing, Telit does not make any warranty as to the information contained herein, and does not accept any liability for any injury, loss or damage of any kind incurred by use of or reliance upon the information.


Telit disclaims any and all responsibility for the application of the devices characterized in this document, and notes that the application of the device must comply with the safety standards of the applicable country, and where applicable, with the relevant wiring rules.

Telit reserves the right to make modifications, additions and deletions to this document due to typographical errors, inaccurate information, or improvements to programs and/or equipment at any time and without notice.

Such changes will, nevertheless be incorporated into new editions of this document.


Copyright: Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited. Offenders will be held liable for payment of damages. All rights are reserved.

Copyright © Telit Communications S.p.A. 2010.



Telit GE864 and GC864 Product Description
80273ST10008a Rev. 18, 2010-06-03

- 3.11.15. *Acoustic signaling*..... 25
- 3.11.16. *Buzzer output*..... 25
- 3.11.17. *RF Transmission Monitor*..... 25
- 3.12. LOGIC LEVEL SPECIFICATIONS 25
 - 3.12.1. *Reset signal*..... 26
- 3.13. AUDIO LEVELS SPECIFICATIONS 26
- 3.14. CONVERTERS 27
 - 3.14.1. *ADC Converter*..... 27
 - 3.14.2. *DAC Converter*..... 27
- 3.15. MOUNTING THE GE864 ON YOUR BOARD 28
 - 3.15.1. *General*..... 28
- 3.16. MOUNTING THE GC864 ON YOUR BOARD 28
- 4. PACKING SYSTEM 29
 - 4.1. GE864 PACKAGE 29
 - 4.1.1. *GE864 Tray package*..... 29
 - 4.1.2. *GE864 Reel package*..... 30
 - 4.2. GC864 PACKAGE 31
- 5. EVALUATION KIT 32
- 6. SOFTWARE FEATURES 34
 - 6.1. EASY GPRS EXTENSION 34
 - 6.1.1. *Overview*..... 34
 - 6.2. MULTISOCKET 35
 - 6.3. JAMMED DETECTION..... 35
 - 6.3.1. *Overview*..... 35
 - 6.4. CMUX 35
 - 6.4.1. *Architecture*..... 35
 - 6.4.2. *Implementation feature and limitation*..... 36
 - 6.5. EASY SCRIPT EXTENSION - PYTHON INTERPRETER..... 36
 - 6.5.1. *Overview*..... 36
 - 6.5.2. *Python 1.5.2+ Copyright Notice*..... 38
 - 6.6. SAP: SIM ACCESS PROFILE..... 39
 - 6.6.1. *Architecture*..... 39
 - 6.6.2. *Implementation features*..... 39
 - 6.6.3. *Remote SIM Message Command Description*..... 39
 - 6.7. PFM (PREMIUM FOTA MANAGEMENT) 40
 - 6.7.1. *FOTA (Firmware Over-The-Air)*..... 40
- 7. AT COMMANDS..... 42
 - HAYES STANDARD AT COMMAND SET, IN ORDER TO MAINTAIN THE COMPATIBILITY WITH EXISTING SW PROGRAMS. 42
- 8. DRIVERS 43
- 9. CONFORMITY ASSESSMENT ISSUES..... 44
 - 9.1. GE864-QUAD CONFORMITY ASSESSMENT 46
 - 9.2. GE864-PY CONFORMITY ASSESSMENT..... 48

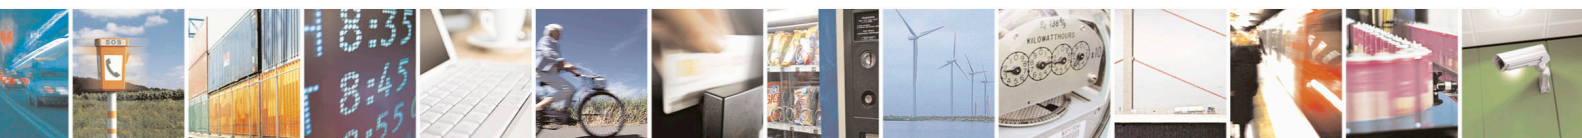




Tip or Information – Provides advice and suggestions that may be useful when integrating the module.

All dates are in ISO 8601 format, i.e. YYYY-MM-DD.

1.5. Related Documents

The following is a list of applicable documents downloadable from the Download Zone section of Telit website <http://www.telit.com>

- GC864 Hardware User Guide, 1v0300733;
- GE864 Hardware User Guide, 1v0300694;
- GE864-QUAD vs. QUAD V2, QUAD Automotive and QUAD Automotive V2 Application Note, 80000nt10024a;
- GC864-QUAD vs. QUAD V2 and DUAL V2 Application Note, 80000nt10034a;
- Easy GPRS User Guide, 80000ST10028;
- Easy Script in Python, 80000ST10020a;
- CMUX User Guide, 30268ST10299a;
- SIM Access Profile User Guide, 8000ST10029;
- AT Commands Reference Guide, 80000ST10025a;
- SIM Application toolkit AT commands, 80000NT10030A
- Telit modules SW User Guide 1v0300784;
- Telit EVK2 User Guide, 1v0300704.
- Global Form Factor Application Note, 80000NT10010A
- Event Monitor Application Note, 80000NT10028a
- Running AT commands remotely Application Note, 80000nt10029a
- Antenna Detection Application Note, 80000NT10002a
- SIM Holder Design Guides, 80000nt10001a
- Audio Settings Application Note, 80000NT10007a
- Digital Voice Interface Application Note, 80000nt10004a
- RTC Backup Application Note, 80000NT10005A



2. Overview

The **Telit GE864** and **GC864 modules** are small, lightweight, low power consumption and RoHS compliant devices that allow digital communication services wherever a GSM 850, 900, DCS 1800 or PCS 1900 network is present.

The **GE864** is a low cost connector-less top-notch solution for medium to high quantity projects.

The **GC864** is provided with an 80-pin Molex board-to-board connector and a 50 Ohm Murata RF connector. It has the same performance as GE864.

The **GC864-QUAD with SIM holder** has an integrated SIM holder on the board and identical technical characteristics as the classic **GC864-QUAD**.


The **GE864-PY** and **GC864-PY** models integrate the "**EASY SCRIPT**" on top of all other features of the **GE864-QUAD** and **GC864-QUAD**. Python is an engine script interpreter, allowing self-controlled operations. With the **EASY SCRIPT** feature the **GE864-PY** and **GC864-PY** become a finite product, they just need your script to be run.

All **GE864** and **GC864** models includes features like GPRS Class 10, Voice, Circuit Switched Data transfer, Fax, Phonebook and SMS support, 'EASY GPRS' embedded TCP/IP stack and battery charging capabilities.

The **GE864** and **GC864** are specifically designed and developed by **Telit** for OEM usage and dedicated to portable data, voice and telemetric applications such as:

- Telemetry and Telecontrol (SCADA applications);
- Security systems;
- Automated Meter Reading (AMR);
- Vending machines;
- POS terminals;
- PDAs and Mobile Computing;
- Phones and Payphones;
- Automotive and Fleet Management applications;
- Battery powered applications needing a battery charger;
- Return channel for digital broadcasting;
- Applications, where the external application processor can be replaced by the PYTHON engine provided by the GE864-PY or GC864-PY.

All models support the following functionalities

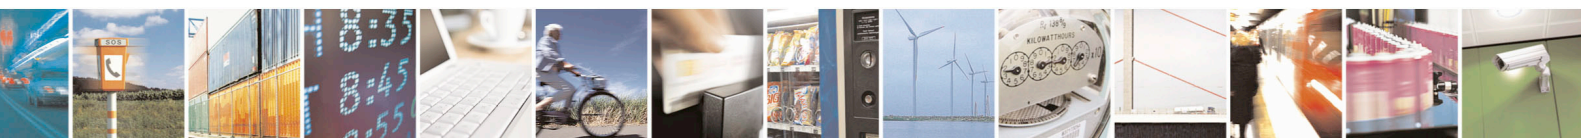

Telit GE864 and GC864 Product Description
80273ST10008a Rev. 18, 2010-06-03

- EASY GPRS (AT driven embedded TCP/IP protocol stack);
- EASY SCAN (full GSM frequency scanning);
- JAMMING DETECTION (detect the presence of disturbing devices);
- CMUX;
- SAP (SIM Access Profile);
- SIM Application toolkit
- Multisocket;

From the interface point of view, the **GE864** and **GC864** provide the following:

- Full RS232 UART, CMOS level (ASC0) interface for AT commands:
 - Autobauding up to 115.2 Kbps;
 - Fixed baud rate from 300 bit/s up to 115.2 Kbps;
- Two wires RS232, CMOS level (ASC1) for PYTHON debug;
- SIM card interface, 1.8 / 3 volts with auto-detection, hot insertion;
- 21 x GPIO ports (max);
- 3 x A/D converters;
- 1 x D/A converter;
- 1 x buzzer output;
- 1 x vibrator motor driver output;
- 1 x single led supply output.

In order to meet the competitive OEM and vertical market stringent requirements, Telit supports its customers with a dedicated Support Policy with:


Telit Evaluation Kit EVK2 to help you develop your application;
A Website with all updated information available;
A high level specialized technical support to assist you in your development.

For more updated information concerning the product roadmaps and availability, technical characteristics, commercial and other issues, please check on the Telit website www.telit.com > Products > Modules.



NOTICE:

Some of the performances of the **Telit modules** depend on the SW version installed on the module itself. The **Telit modules** SW group is continuously working in order to add new features and improve the overall performances. The **Telit modules** are easily upgradeable by the developer using the **Telit Flash Programmer**. Furthermore, all the **Telit modules** have the conformity assessment against R&TTE.

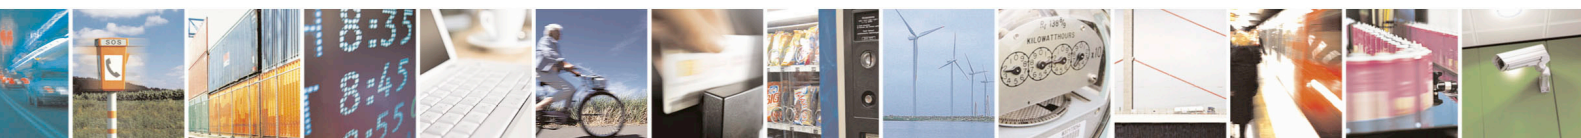

3. General Product Description



3.1. Dimensions

3.1.1. GE864-QUAD/PY



The Telit GE864 module overall dimensions are:

Length: 30 mm
Width: 30 mm
Thickness: 2.8 mm

DETAIL 1
SCALE 8:1

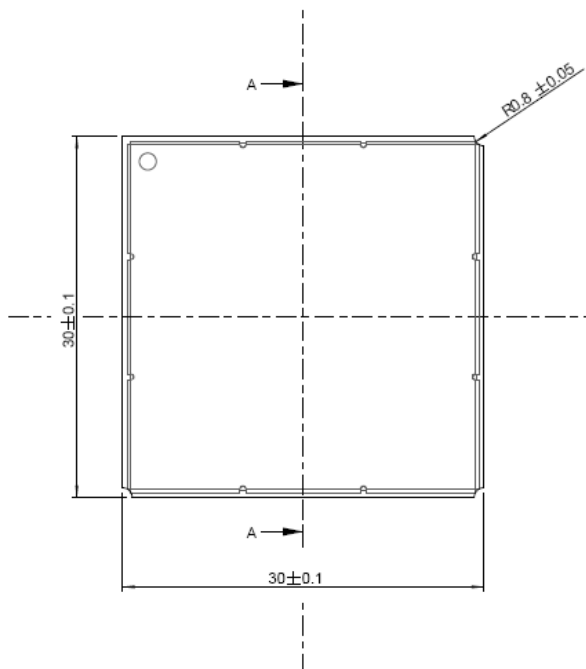


SEZIONE A-A

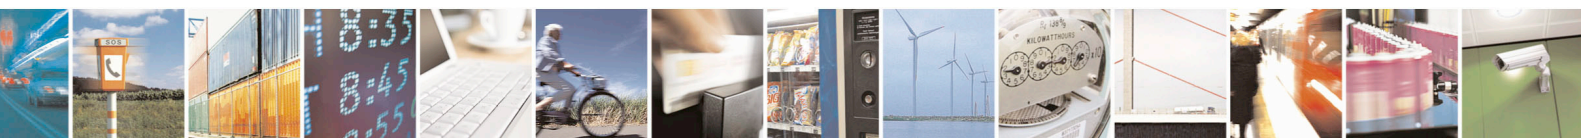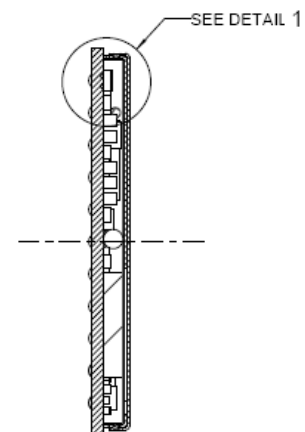


3.1.2. GC864-QUAD/PY with and without SIM Holder

The Telit GC864 module overall dimensions are:

Length: 36.2 mm
Width: 30 mm
Thickness: 3.2 mm

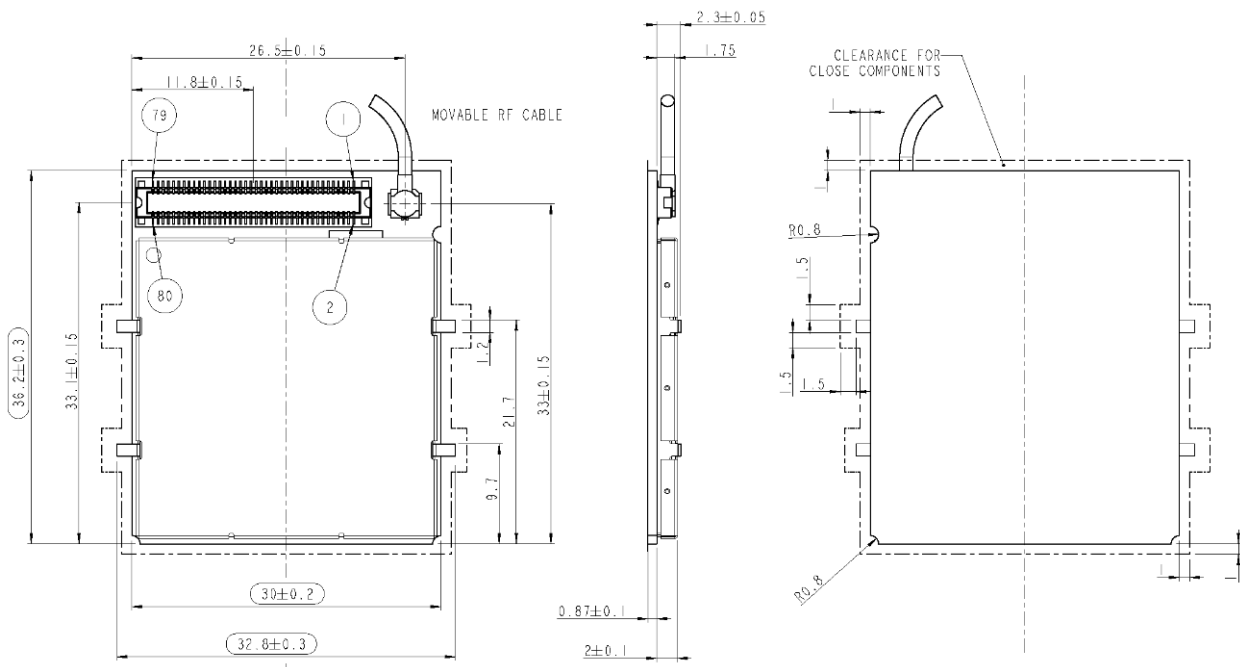

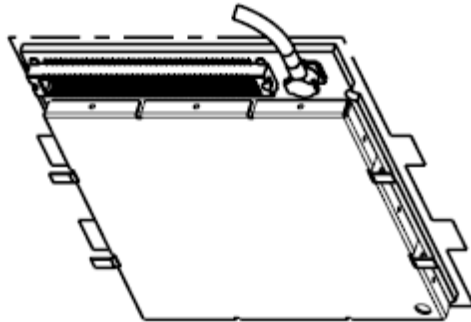

3.2. Weight


weight	
GE864-QUAD/PY	6 gr
GC864 -QUAD/PY	6,1 gr

3.3. Environmental requirements

The Telit GE864 and GC864 modules are compliant with the applicable ETSI reference documentation GSM 05.05 Release1998.

3.3.1. Temperature range

	GE864-QUAD/PY	GC864-QUAD/PY	Note
Operating Temperature Range	-20°C ÷ +55°C	-20°C ÷ +55°C	The module is fully functional(*) in all the temperature range, and it fully meets the 3GPP specifications.
	-40°C ÷ +85°C	-40°C ÷ +85°C	The module is fully functional (*) in all the temperature range.
Storage and Non Operating Temperature Range	-40°C ÷ +85°C	-40°C ÷ +85°C	

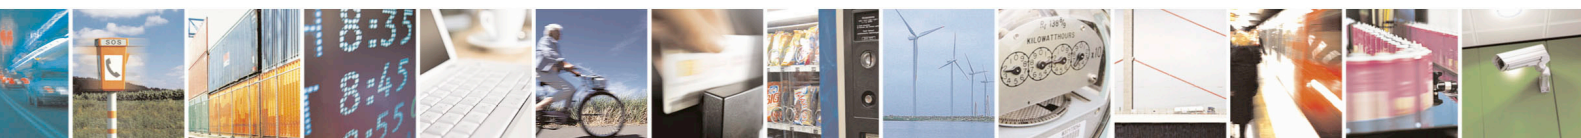

(*) Functional: the module is able to make and receive voice calls, data calls, SMS and make GPRS traffic.

3.3.2. Vibration Test (non functional)

10 ÷ 12Hz ASD = 1.92m²/s³
12 ÷ 150Hz -3dB/oct

These values are valid for the GE864-QUAD/PY and GC864-QUAD/PY modules only.

3.3.3. RoHS compliance

As a part of Telit corporate policy regarding environmental protection, the **GE864** and **GC864** comply with the RoHS (Restriction of Hazardous Substances) directive of the European Union (EU Directive 2002/95/EG).


3.4. Operating Frequency

The operating frequencies in GSM, DCS, PCS modes are conform to the GSM specifications.

Mode	Freq. TX (MHz)	Freq. RX (MHz)	Channels (ARFC)	TX – RX offset
GSM-850	824.2÷848.8	869.2÷893.8	128 ÷ 251	45 MHz
E-GSM-900	890.0 – 914.8	935.0 – 959.8	0 – 124	45 MHz
	880.2 – 889.8	925.2 – 934.8	975 – 1023	45 MHz
DCS-1800	1710.2 – 1784.8	1805.2 – 1879.8	512 – 885	95 MHz
PCS-1900	1850.2 – 1909.8	1930.2 – 1989.8	512 – 810	80 MHz

3.5. Transmitter output power

GSM-850/900

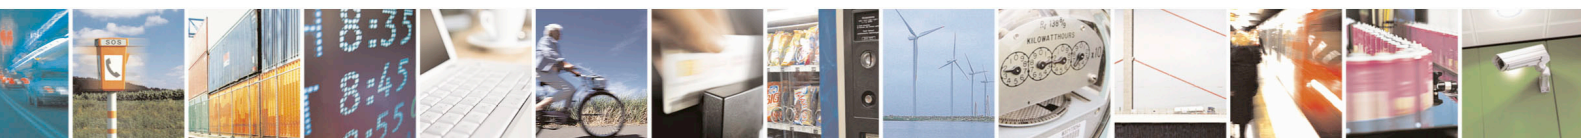

Telit GE864 and GC864 Product Description

80273ST10008a Rev. 18, 2010-06-03

The **Telit GE864** and **GC864** transceiver modules, in GSM-850/900 operating mode, are **class 4** in accordance with the specifications which determine the nominal 2W peak RF power (+33dBm) on 50 Ohm.

DCS-1800/PCS-1900

The **Telit GE864** and **GC864** transceiver modules, in DCS-1800/PCS-1900 operating mode, are **class 1** in accordance with the specifications which determine the nominal 1W peak RF power (+30dBm) on 50 Ohm.

3.6. Reference sensitivity

The sensitivity of the GE864 and the GC864 modules in GSM 850/900 bands is better than -107 dBm (2.4% BER Class II - static channel) in normal operating conditions.

The sensitivity in GSM 1800/1900 bands is better than -106 dBm (2.4% BER Class II - static channel) in normal operating conditions.

The P/Ns Gx864QUx00xxxxx also support the Downlink Advance Receiver Performance (DARP) feature for single antenna interference cancellation (SAIC).



3.11. User Interface

The user interface is managed by AT commands specified on the ITU-T V.250, GSM 07.07 and 07.05 specifications (3GPP 27.005, 27.007 for P/Ns: Gx864QUx00xxxxx), and Telit custom AT commands.

3.11.1. Speech Coding

The **GE864** and **GC864** voice codec support the following rates:

Half Rate;
Full rate;
Enhanced Full Rate;
Adaptive Multi Rate.

3.11.2. SIM Reader

The **GE864** and **GC864** modules support phase 2 GSM11.14 – SIM 1.8V and 3V ONLY with an external SIM connector. For 5V SIM operation an external level translator can be added.

3.11.3. SMS


The **GE864** and **GC864** support the following SMS types:

- Mobile Terminated (MT) class 0 – 3 with signaling of new incoming SMS, SIM full, SMS read;
- Mobile Originated class 0 – 3 with writing, memorize in SIM and sending;
- Cell Broadcast compatible with CB DRX with signaling of new incoming SMS.
- SMS over GPRS

3.11.4. Real Time Clock and Alarm

The **Telit GE864** and **GC864** support the Real Time Clock and Alarm functions through AT commands, furthermore an alarm output pin (GPIO6) can be configured to indicate the alarm with a hardware line output.

Furthermore the Voltage Output of the RTC power supply is provided so that a backup capacitor can be added to increase the RTC autonomy.

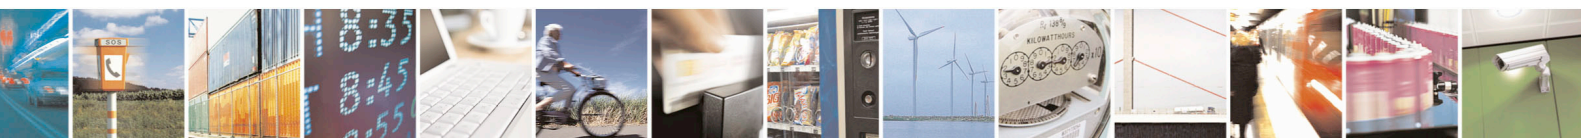

3.11.5. Data/fax transmission

The Telit GE864 and GC864 support:

- GPRS Class 10, MS Class B;
- CSD up to 14.4 Kbps;
- Fax service, Class 1 Group 3;
- PBCCH;
- GERAN Feature Package 1 support (NACC, Extended TBF) – only P/N Gx864QUx00xxxxx;

The P/Ns Gx864QUx00xxxxx are also 3GPP Release 4 compliant.

3.11.6. Enhanced Measurement Report

The P/Ns Gx864QUx00xxxxx supports also the Enhanced Measurement Report on SACCH channel according to 3GPP TS 44.018 version 4.22.0 Release 4 (par. 3.4.1.2, 9.1.54, 9.1.55) and 3GPP TS 45.008 version 4.17.0 Release 4 (par. 8.4.8).

3.11.7. Local security management

The local security management can be done with the lock of Subscriber Identity module (SIM), and security code request at power-up.

3.11.8. Call control


The call cost control function is supported.

3.11.9. Phonebook

This function allows the storing of the telephone numbers in SIM memory. The capability depends on SIM version and embedded memory.

3.11.10. Characters management

The Telit GE864 and GC864 support the following character sets:

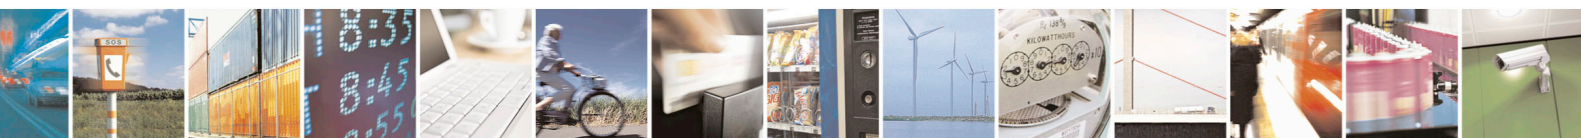

IRA (International Reference Alphabet), in TEXT and PDU mode;
UCS2;
GSM Default

3.11.11. SIM related functions

Activation and deactivation of the numbers stored in phone book FDN, © and PINs are supported. Extension at the PIN2 for the PUK2 insertion capability for lock condition is supported.

3.11.12. Call status indication

The call status indication by AT commands is supported.


3.11.13. Automatic answer (Voice, Data or FAX)

After a specified number of rings, the module will automatically answer with a beep. The user can set the number of rings by means of the command `ATS0=<n>`.

3.11.14. Supplementary services (SS)

The following supplementary services are supported:

Call Barring;
Call Forwarding;
Calling Line Identification Presentation (CLIP);
Calling Line Identification Restriction (CLIR);
Call Waiting, other party call Waiting Indication;
Call Hold, other party Hold / Retrieved Indication;
Closed User Group supplementary service (CUG);
Advice of Charge;
Unstructured SS Mobile Originated (MO).

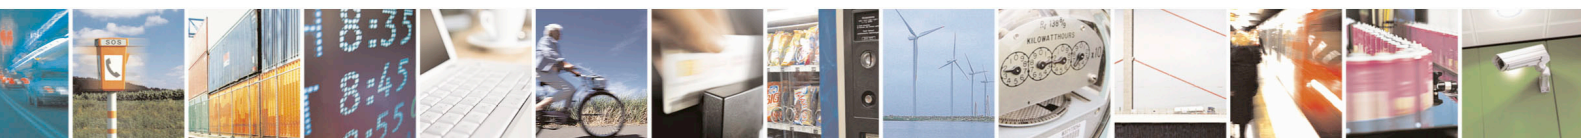

3.12.1. Reset signal

Signal	Function	I/O	GE864 ball	GC864 pin
RESET	Phone reset	I/O	A2	54

RESET is used to reset the **GE864** and **GC864**. Whenever this signal is pulled low, the **GE864 / GC864** is reset. When the device is reset it stops any operation and after the release of the reset it is unconditionally rebooted, without doing any detach operation from the network where it is registered to. This behavior is not like a proper shut down because any GSM device is requested to issue a detach request on turn off. For this reason, the Reset signal must not be used to normally shutting down the device, but only as an emergency exit in the rare case the device remains stuck waiting for some network response.

The RESET is internally controlled on start-up to achieve always a proper power-on reset sequence, so there is no need to control this pin on start-up. It may only be used to reset a device already switched on that is not responding to any command.



WARNING:

Do not use this signal to power off the Telit GE864 / GC864 modules. Use the ON_OFF* signal to perform this function or the AT#SHDN command instead.


3.13. Audio levels specifications

The audio of the **GE864 / GC864** modules is organized into two main paths:

- internal path (called also MT)
- external path (called also HF)

These two paths are meant respectively for handset and headset/hands-free use. The **GE864 / GC864** has a built in echo canceller and a noise suppressor, tuned separately for the two audio paths; for the internal path the echo canceller parameters are suited to cancel the echo generated by a handset, while for the external audio path they are suited for a hands-free use.

For more information on the audio, refer to the Hardware User Guide.

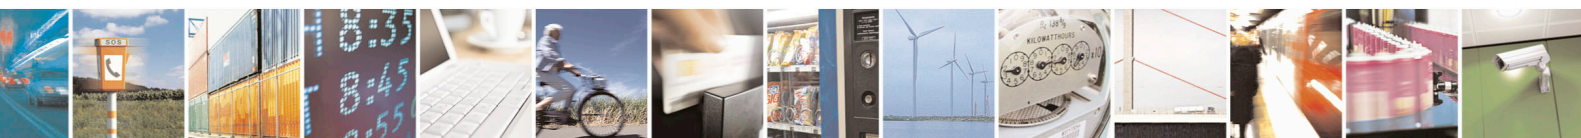

3.14. Converters

3.14.1. ADC Converter

The on-board ADCs are 11-bit converters. They are able to read a voltage level in the range of 0÷2 volts applied on the ADC pin input, store and convert it into 11 bit word.

	Min	Max	Units
Input Voltage range	0	2	Volt
AD conversion	-	11	bits
Resolution	-	< 1	mV
Sampling rate	1 (idle)	60 (on traffic)	sec

3.14.2. DAC Converter

The on board DAC is a 10-bit converter, able to generate an analogue value based a specific input in the range from 0 up to 1023. However, an external low-pass filter is necessary. See the HW User Guide for the details.

	Min	Max	Units
Voltage range (filtered)	0	2,6	Volt
Range	0	1023	Steps




3.15. Mounting the GE864 on your Board

3.15.1. General

The Telit GE864 modules have been designed in order to be compliant with a standard lead-free SMT process. For detailed information about PCB pad design and conditions to use in SMT process, please consult the GE864 Hardware User Guide.


3.16. Mounting the GC864 on your board

The position of the Molex board to board connector and the pin 1 are shown in the following picture.

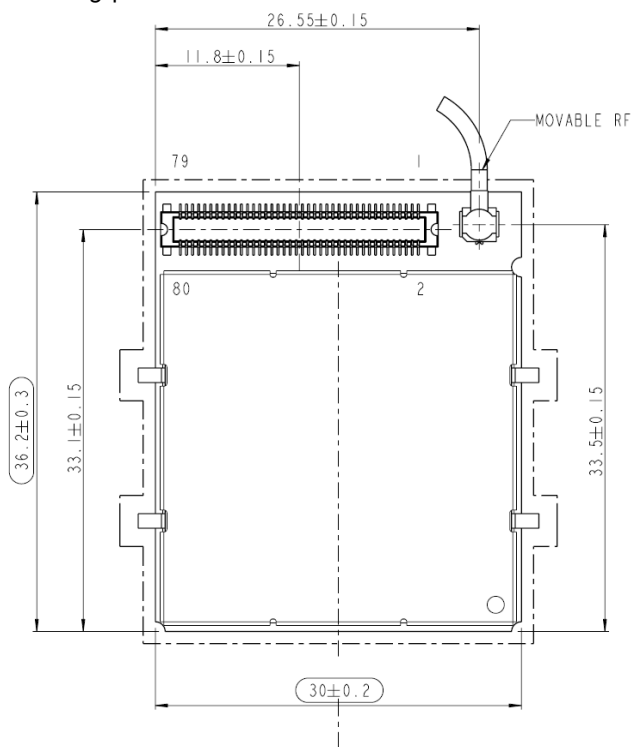

NOTICE:

Metal tabs present on GC864 should be connected to GND.

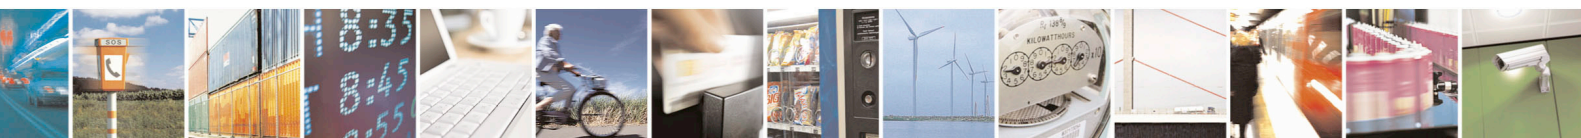


4. Packing system

The **GE864** and **GC864** are packaged on trays of 20 pieces each. This is especially suitable for the GE864 according to SMT processes for pick & place movement requirements. Moreover, GE864 is also available in 200-pieces reels.

4.1. GE864 Package

4.1.1. GE864 Tray package

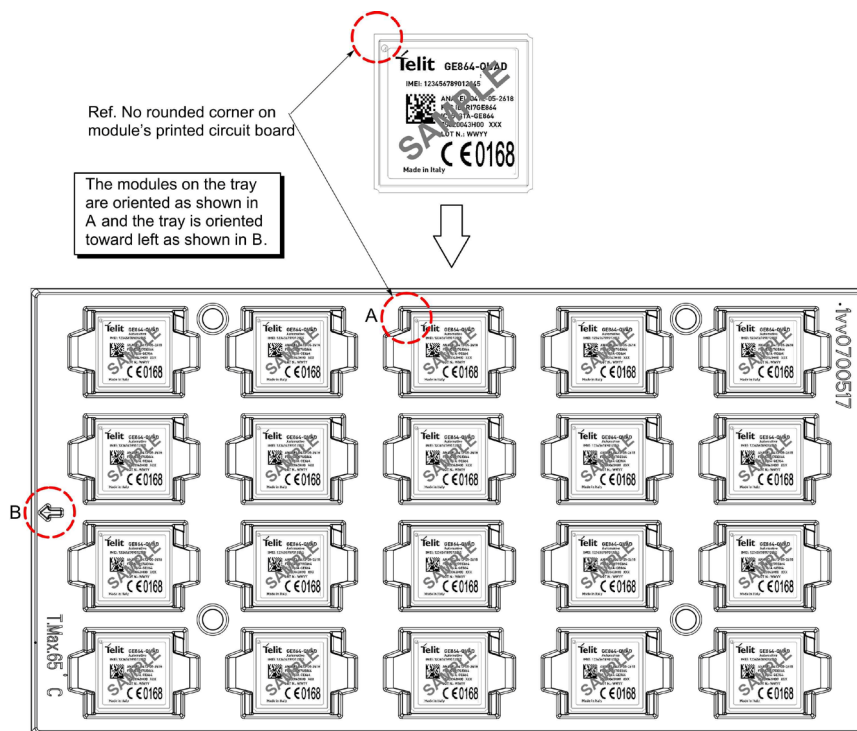


The size of the tray is: 329 x 176mm




WARNING:

These trays can withstand at the maximum temperature of 65° C.

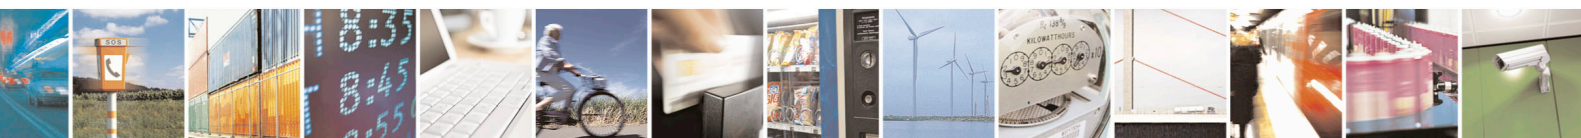


4.1.2. GE864 Reel package

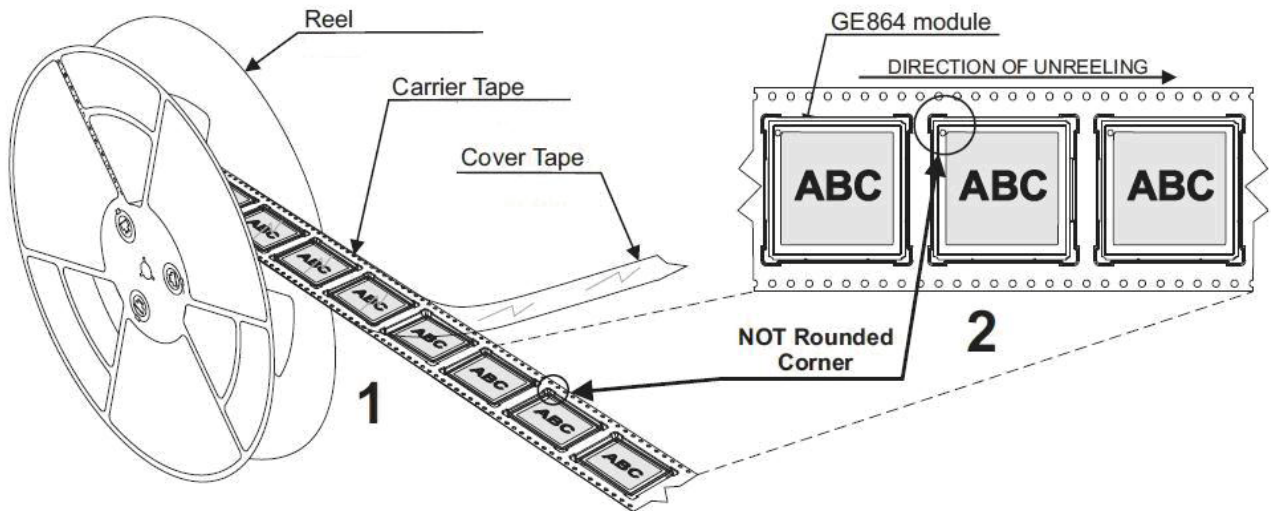

4.2. GC864 package

The modules are placed in the tray up side down and oriented as shown in figure.

The tray is oriented toward left (see particular A)

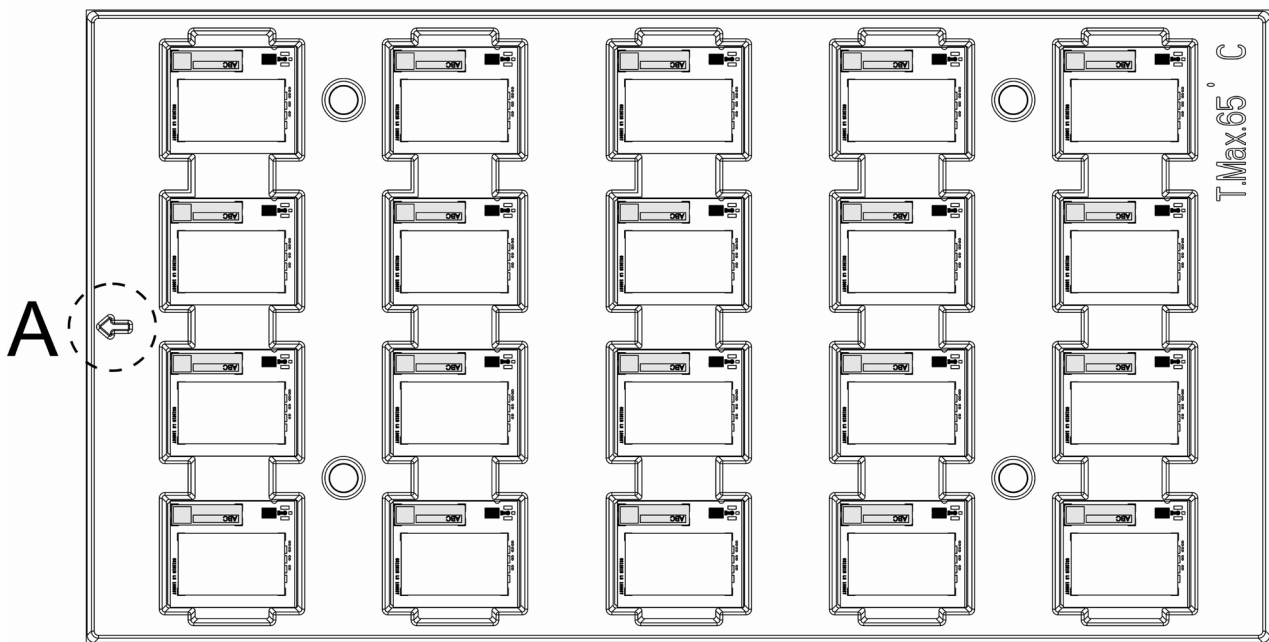

WARNING:

These trays can withstand at the maximum temperature of 65° C.



5. Evaluation Kit

In order to assist you in the development of your **Telit GE864 / GC864 module** based application, Telit can supply the **EVK2 Evaluation Kit** with appropriate power supply, SIM card housing, RS 232 serial port level translator, direct UART connection, Handset, Headset and Hands-free (car kit) audio, antenna.

The **EVK2** provides a fully functional solution for a complete data/phone application. The standard serial RS232 9 pin connector placed on the **Evaluation Kit** allows the connection of the **EVK2** system with a PC or other DTE.


The development of the applications utilizing the **Telit GE864 / GC864 module** must present a proper design of all the interfaces towards and from the module (e.g. power supply, audio paths, level translators), otherwise a decrease in the performances will be introduced or, in the worst case, a wrong design can even lead to an operating failure of the module.

In order to assist the hardware designer in his project phase, the **EVK2** board presents a series of different solutions, which will cover the most common design requirements on the market, and which can be easily integrated in the OEM design as building blocks or can be taken as starting points to develop a specific one.

The **EVK2** is an open air PCB, produced to ease the application development for Telit customers. As far as radio frequencies, the **EVK2** is shieldless, and should not be used as reference design.



GE864 Evaluation Kit

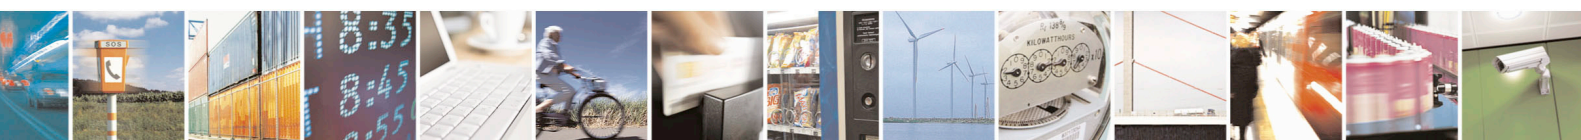

Telit GE864 and GC864 Product Description
80273ST10008a Rev. 18, 2010-06-03

For a detailed description of the **Telit Evaluation Kit** refer to the documentation provided with the Telit **GE864 / GC864** Hardware User Guide and EVK2 User Manual.




6. Software Features

6.1. Easy GPRS Extension


6.1.1. Overview

The Easy GPRS feature allows the **Telit GE864 / GC864** user to contact a device in internet and establish with it a raw data flow over the GPRS and Internet networks. This feature can be seen as a way to obtain a "virtual" serial connection between the Application Software on the Internet machine involved and the controller of the **Telit GE864 / GC864** module, regardless of all the software stacks underlying. An example of the protocol stack involved in the devices is reported:

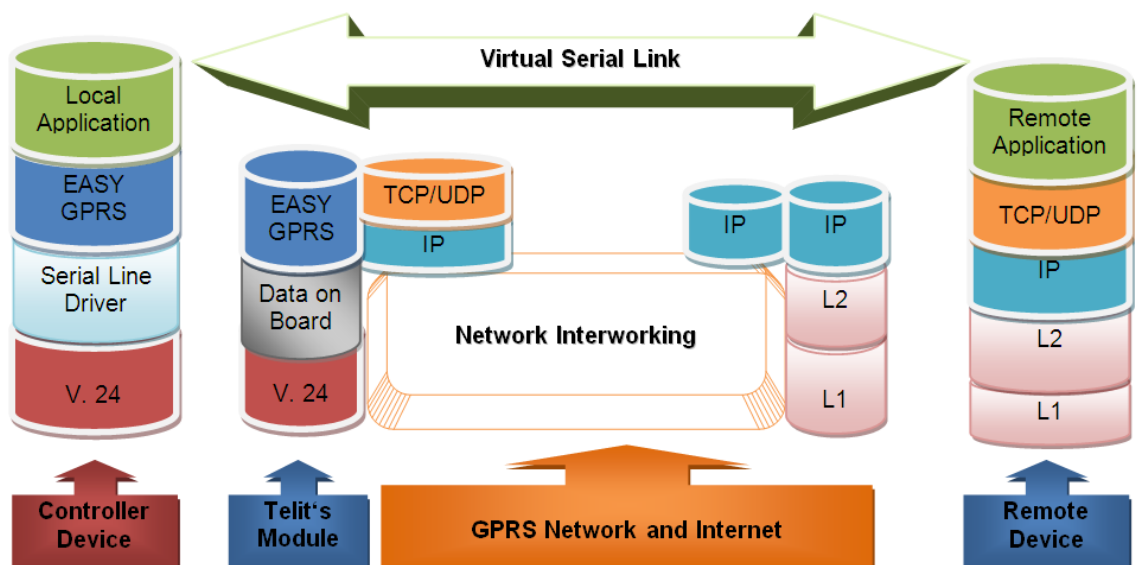

This particular implementation allows to the devices interfacing to the **Telit GE864 / GC864** module the use of the GPRS and Internet packet service without the need to have an internal TCP/IP stack since this function is embedded inside the module.

For more detailed information regarding the use of the Easy GPRS feature, please consult Easy GPRS User Guide and AT Commands Reference Guide.

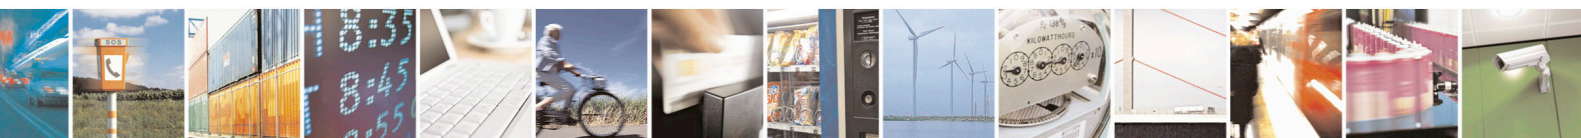

6.5.2. Python 1.5.2+ Copyright Notice

The Python code implemented into the **Telit module** is copyrighted by Stichting Mathematisch Centrum, this is the license:

Copyright © 1991-1995 by Stichting Mathematisch Centrum, Amsterdam, The Netherlands.

All Rights Reserved

Copyrig©(c) 1995-2001 Corporation for National Research Initiatives; All Rights Reserved.

Copy©ht (c) 2001, 2002, 2003, 2004 Python Software Foundation; All Rights Reserved.


C©right (c) 2001-2008 Python Software Foundation; All Rights Reserved.

All Rights Reserved are retained in Python.

Permission to use, copy, modify, and distribute this software and its documentation for any purpose and without fee is hereby granted, provided that the above copyright notice appear in all copies and that both that copyright notice and this permission notice appear in supporting documentation, and that the names of Stichting Mathematisch Centrum or CWI or Corporation for National Research Initiatives or CNRI not be used in advertising or publicity pertaining to distribution of the software without specific, written prior permission.

While CWI is the initial source for this software, a modified version is made available by the Corporation for National Research Initiatives (CNRI) at the Internet address <ftp://ftp.python.org>.

STICHTING MATHEMATISCH CENTRUM AND CNRI DISCLAIM ALL WARRANTIES WITH REGARD TO THIS SOFTWARE, INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS, IN NO EVENT SHALL STICHTING MATHEMATISCH CENTRUM OR CNRI BE LIABLE FOR ANY SPECIAL, INDIRECT OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

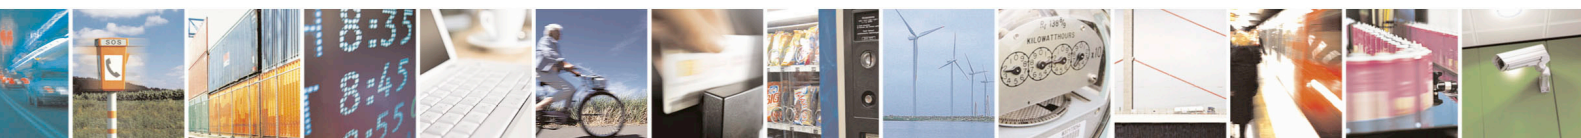

7. AT Commands

The **Telit GE864 / GC864 module** can be driven via the serial interface using the standard AT commands.

The Telit GE864 / GC864 module is compliant with:

Hayes standard AT command set, in order to maintain the compatibility with existing SW programs.



- ETSI GSM 07.07 (3GPP 27.007 for the new P/Ns: Gx864QUx00xxxxx) specific AT command and GPRS specific commands.
- ETSI GSM 07.05 (3GPP 27.005 for the new P/Ns: Gx864QUx00xxxxx) specific AT commands for SMS (Short Message Service) and CBS (Cell Broadcast Service).
- FAX Class 1 compatible commands

Moreover, the **Telit GE864 / GC864 module** support also Telit proprietary AT commands for special purposes.

For more information about AT commands supported by GE864/GC864 modules, please refer to document AT Commands Reference Guide, code 80000ST10025a.



ZERTIFIKAT • CERTIFICATE • 認証証書 • CERTIFICADO • CERTIFICAT

Certificate

This certificate is issued to

TELIT Communications S.p.A.


of

Viale Stazione di Prosecco 5/B
34010 Sgonico
Trieste
Italy

to certify that the Equipment known as

GE864-QUAD

as described in the Annex to this certificate conforms to the essential requirements of Directive 1999/5/EC of the European Parliament and European Council on the basis of Technical Construction File number 22345_GE864-QUAD_rev1 in relation to the essential requirements of Articles 3.1(a), 3.1(b) & 3.2 of the Directive.


Signed: 
On Behalf of B A B T

Issue Date: 08 February 2006

Number: NC/12659 Issue: 01

This certificate is issued by B A B T and represents a formal Notified Body opinion under Annex IV of Directive 1999/5/EC permitting the use of the B A B T (E0168) mark on the equipment described above subject to the equipment meeting the compliance requirements of all applicable EU directives. This certificate is not transferable and remains the property of B A B T.

British Approvals Board for Telecommunications • TÜV SÜD Group •
Balfour House • Churchfield Road • Walton-on-Thames • Surrey • KT12 2TD • United Kingdom





9.3. GE864-QUAD/PY: RoHS certificate



DECLARATION OF EU RoHS Compliance

We, *Telit Communications S.p.A*

Of: *Via Stazione di Prosecco, 5/b
34010 Sgonico (TRIESTE)
ITALY*

declare under our sole responsibility that the:

GE864-QUAD products family

to which this declaration relates, is in full compliance with EU Directive 2002/95/EC on Restriction of the use of certain Hazardous Substances in electrical and electronic equipment (RoHS), subsequent amendments, the European Court of Justice decision on Deca-BDE substance from July 1st 2008, and EU Directive 2006/122/EC on restrictions on the market and use of certain dangerous substances and preparations (perfluorooctane sulfonates PFOS and PFOA).


Telit bases its material content knowledge on the test report n. CE/2008/B6490, provided by SGS Chemical Analysis Laboratory dated 2008/12/02.

The technical documentation and other information showing that the electrical and electronic equipment which has put on the market complies the requirements of regulations are held at:

*Telit Communications S.p.A
Via Stazione di Prosecco, 5/b
34010 Sgonico (TRIESTE)
ITALY
Trieste October 06, 2009*



Guido Walcher
EMEA Quality Director

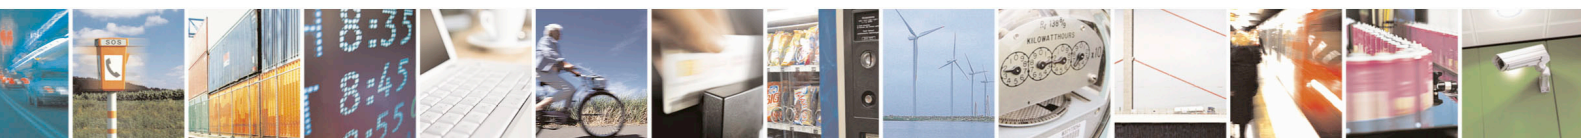

ZERTIFIKAT • CERTIFICATE • 認証証書 • CERTIFICADO • CERTIFICAT




Certificate

This certificate is issued to

TELIT Communications S.p.A.

of

Via Stazione di Prosecco 5/B
34010 Sgonico
Trieste
Italy

to certify that the Equipment known as

GC864-QUAD

as described in the Annex to this certificate conforms to the essential requirements of Directive 1999/5/EC of the European Parliament and European Council on the basis of Technical Construction File number 24383_GC864-QUAD_rev1 in relation to the essential requirements of Articles 3.1(a), 3.1(b) & 3.2 of the Directive.

Signed: 
On Behalf of BABT


Issue Date: 28 July 2006

Number: NC/12869 Issue: 01

This certificate is issued by BABT and represents a formal Notified Body opinion under Annex IV of Directive 1999/5/EC permitting the use of the BABT CE0168 mark on the equipment described above subject to the equipment meeting the compliance requirements of all applicable EU directives. This certificate is not transferable and remains the property of BABT.

British Approvals Board for Telecommunications • TÜV SÜD Group •
Balfour House • Churchfield Road • Walton-on-Thames • Surrey • KT12 2TD • United Kingdom



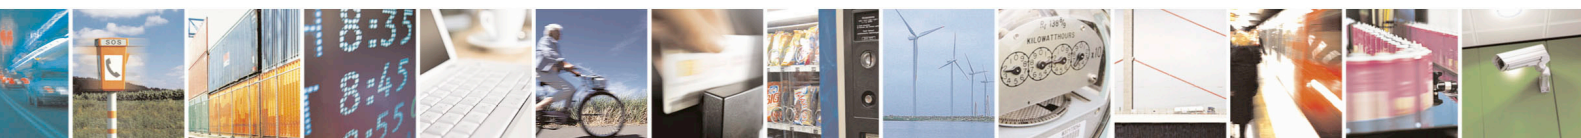

ZERTIFIKAT • CERTIFICATE • 認証証書 • CERTIFICADO • CERTIFICAT




Certificate

This certificate is issued to

TELIT Communications S.p.A.

of

Via Stazione di Prosecco 5/B
34010 Sgonico
Trieste
Italy

to certify that the Equipment known as

GC864-PY

as described in the Annex to this certificate conforms to the essential requirements of Directive 1999/5/EC of the European Parliament and European Council on the basis of Technical Construction File number 23546_GC864-PY_rev1 in relation to the essential requirements of Articles 3.1(a), 3.1(b) & 3.2 of the Directive.

Signed:



On Behalf of BABT

Issue Date: 28 July 2006

Number: NC/12870 Issue: 01

This certificate is issued by BABT and represents a formal Notified Body opinion under Annex IV of Directive 1999/5/EC permitting the use of the BABT 00168 mark on the equipment described above subject to the equipment meeting the compliance requirements of all applicable EU directives. This certificate is not transferable and remains the property of BABT.


British Approvals Board for Telecommunications • TÜV SÜD Group •
Balfour House • Churchfield Road • Walton-on-Thames • Surrey • KT12 2TD • United Kingdom






9.7. GE864-QUAD/PY: FCC Equipment Authorization

TCB	<p>GRANT OF EQUIPMENT AUTHORIZATION</p> <p>Certification Issued Under the Authority of the Federal Communications Commission</p> <p>By:</p> <p>MET Laboratories, Inc. 914 W. Patapsco Avenue Baltimore, MD 21230-3432</p> <p>Date of Grant: 07/13/2006 Application Dated: 07/13/2006</p>	TCB			
<p>Telit Communications S.p.A. Viale Stazione di Prosecco 5/b Trieste, 34010 Italy</p> <p>Attention: Andrea Fragiaco, Ing.</p>					
<p>NOT TRANSFERABLE</p> <p>EQUIPMENT AUTHORIZATION is hereby issued to the named GRANTEE, and is VALID ONLY for the equipment identified hereon for use under the Commission's Rules and Regulations listed below.</p>					
<p>FCC IDENTIFIER: RI7GE864</p> <p>Name of Grantee: Telit Communications S.p.A.</p> <p>Equipment Class: PCS Licensed Transmitter Notes: GSM 850/1900MHz Module</p>					
<u>Grant Notes</u>	<u>FCC Rule Parts</u>	<u>Frequency Range (MHZ)</u>	<u>Output Watts</u>	<u>Frequency Tolerance</u>	<u>Emission Designator</u>
	22H	824.2 - 848.8	1.7	1.0 PM	290KGXW
	24E	1850.2 - 1909.8	0.36	1.0 PM	290KGXW
<p>Power Output is ERP for Part 22 and EIRP for Part 24. The antenna(s) used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter. Installers and end-users must be provided with installation instructions and transmitter operating conditions for satisfying RF exposure compliance.</p>					

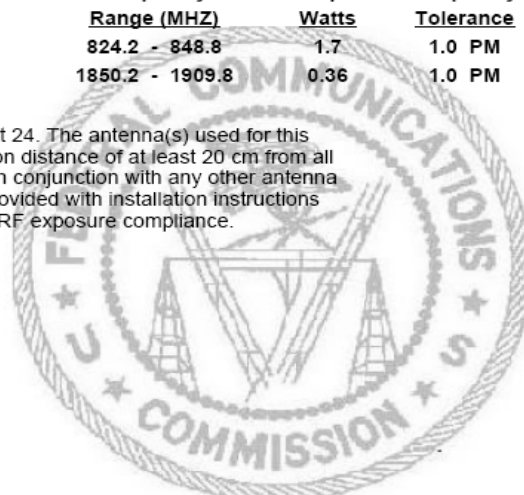


9.8. GC864-QUAD/PY: FCC Equipment Authorization

TCB	<p>GRANT OF EQUIPMENT AUTHORIZATION</p> <p>Certification Issued Under the Authority of the Federal Communications Commission By:</p>	TCB			
<p>Telit Communications S.p.A. Viale Stazione di Prosecco 5/b Trieste, 34010 Italy</p> <p>Attention: Andrea Fragiacomio , Ing.</p>	<p>MET Laboratories, Inc. 914 W. Patapsco Avenue Baltimore, MD 21230-3432</p>	<p>Date of Grant: 07/28/2006 Application Dated: 07/28/2006</p>			
<p>NOT TRANSFERABLE</p> <p>EQUIPMENT AUTHORIZATION is hereby issued to the named GRANTEE, and is VALID ONLY for the equipment identified hereon for use under the Commission's Rules and Regulations listed below.</p>					
<p>FCC IDENTIFIER: RI7GC864</p> <p>Name of Grantee: Telit Communications S.p.A.</p> <p>Equipment Class: PCS Licensed Transmitter</p> <p>Notes: Quad-Band GSM/GPRS module - Type: GC864</p>					
<u>Grant Notes</u>	<u>FCC Rule Parts</u>	<u>Frequency Range (MHZ)</u>	<u>Output Watts</u>	<u>Frequency Tolerance</u>	<u>Emission Designator</u>
	22H	824.2 - 848.8	1.56	1.0 PM	290KGXW
	24E	1850.2 - 1909.8	0.27	1.0 PM	290KGXW
<p>Power Output is ERP for Part 22 and EIRP for Part 24. The antenna(s) used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter. Installers and end-users must be provided with installation instructions and transmitter operating conditions for satisfying RF exposure compliance.</p>					

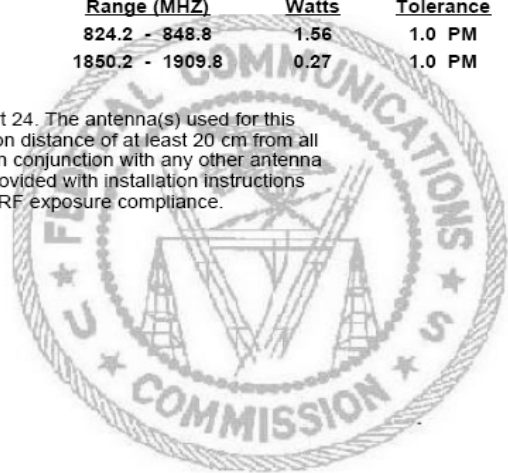

9.10. GC864-QUAD/PY: IC Equipment Authorization



GRANT OF EQUIPMENT CERTIFICATION

THE FOLLOWING EQUIPMENT HAS BEEN TESTED
AND CERTIFIED UNDER
INDUSTRY CANADA
RSS 132 ISSUE 1 PROVISIONAL AUG. 2002, RSS 133 ISSUE 3, JUNE 2005

CB Issued By: **CB**
MET Laboratories, Inc.
914 W. Patapsco Avenue
Baltimore, Maryland 21230
Laboratory Number: 2043

Equipment Certification is hereby issued to the Identified Certificate Holder and is VALID ONLY for the equipment identified herein.
La certification d'équipement est par ceci publiée au support identifié de certificate et est VALIDE SEULEMENT pour l'équipement identifié ci-dessus
NOT TRANSFERABLE / NON TRANSMISSIBLE

FILE/CERTIFICATE NUMBER: 081-07-2006-20414

CERTIFICATION NUMBER: IC: 5131A-GC864

Issued to/Délivré a:	Telit Communications S.p.A	Date of Grant:	July 28, 2006
Address:	Viale Stazione di Prosecco 5/B I-34010 Trieste, Italy		
Nature of Application/Nature d'Application:	Original		
Equipment Description/Genre de Matériel:	Quad-Band GSM/GPRS module		
Equipment Category/Catégorie de Matériel:	Category I		
Model Number(s)/Marque et Modele	GC864-QUAD GC864-PY		
Conducted RF Power or Field Strength/Puissance H.F.:	1.56 Watts(eirp) and 0.27 Watts(erp)		
Frequency Range/Bande de Fréquences:	824.2-848.8MHz and 1850.2-1909.8 MHz		
Bandwidth(s)/ largeurs de bande:	290 KHz		
Emission Designations/Genre D'Émission:	290KGXW		
Antenna Information/ l'information d'antenne:	N/A		


Test Lab: rorejas@cetecom.es Tel: 34-952-61-93-57
IC-4621


Notes: Power Output is ERP for Part 22 and EIRP for Part 24. The antenna(s) used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter. Installers and end-users must be provided with installation instructions and transmitter operating conditions for satisfying RF exposure compliance.

Certification of equipment means only that the equipment met the requirements of the above noted specification(s). License applications, where applicable to use certified equipment, are acted on accordingly by the issuing office and will depend on the existing radio environment, service and location of operation. This certificate is issued on condition that the holder complies and will continue to comply with requirements and procedures issued by Industry Canada.

L'homologation de matériel terminal signifie seulement qu'il est conforme aux exigences du cahier des charges mentionné ci-dessus. Les demandes de licence, le cas échéant en vue de l'utilisation de matériel certifié seront traitées en conséquence par le bureau chargé de délivrer les dites licences, en tenant compte du milieu radioélectrique ambiant, du service radio existant et de l'emplacement de la station. Le présent certificate est délivré à condition que le détenteur se conforme et continue à se conformer aux cahiers des charges et procédures sur les norms radioélectriques publiées par le ministère.

ISSUED UNDER THE AUTHORITY OF THE MINISTER OF INDUSTRY
DELIVRE AVEC L'AUTORISATION DU MINISTRE DES INDUSTRIES


 Kevin Mahaffey
 Manager, EMC Laboratory
 Printed: July 28, 2006



DOC-ICR001 3/11/2005



Telit GE864 and GC864 Product Description

80273ST10008a Rev. 18, 2010-06-03

The European Community provides some Directives for the electronic equipments introduced on the market. All the relevant information's are available on the European Community website:

<http://ec.europa.eu/enterprise/sectors/rtte/documents/>

The text of the Directive 99/05 regarding telecommunication equipments is available, while the applicable Directives (Low Voltage and EMC) are available at:

<http://ec.europa.eu/enterprise/sectors/electrical/>



11. List of acronyms

ACM	Accumulated Call Meter
ASCII	American Standard Code for Information Interchange
AT	Attention commands
CB	Cell Broadcast
CBS	Cell Broadcasting Service
CCM	Call Control Meter
CLIP	Calling Line Identification Presentation
CLIR	Calling Line Identification Restriction
CMOS	Complementary Metal-Oxide Semiconductor
CR	Carriage Return
CSD	Circuit Switched Data
CTS	Clear To Send
DAI	Digital Audio Interface
DCD	Data Carrier Detected
DCE	Data Communications Equipment
DRX	Data Receive
DSR	Data Set Ready
DTA	Data Terminal Adaptor
DTE	Data Terminal Equipment
DTMF	Dual Tone Multi Frequency
DTR	Data Terminal Ready
EMC	Electromagnetic Compatibility
ETSI	European Telecommunications Equipment Institute
FTA	Full Type Approval (ETSI)
GPRS	General Radio Packet Service
GSM	Global System for Mobile communication
HF	Hands Free
IMEI	International Mobile Equipment Identity
IMSI	International Mobile Subscriber Identity
IRA	International Reference Alphabet
ITU	International Telecommunications Union
IWF	Inter-Working Function
LCD	Liquid Crystal Display
LED	Light Emitting Diode
LF	Linefeed
ME	Mobile Equipment
MMI	Man Machine Interface
MO	Mobile Originated



Telit GE864 and GC864 Product Description
80273ST10008a Rev. 18, 2010-06-03

MS	Mobile Station
MT	Mobile Terminated
OEM	Other Equipment Manufacturer
PB	Phone Book
PDU	Protocol Data Unit
PH	Packet Handler
PIN	Personal Identity Number
PLMN	Public Land Mobile Network
PUCT	Price per Unit Currency Table
PUK	PIN Unblocking Code
RACH	Random Access Channel
RLP	Radio Link Protocol
RMS	Root Mean Square
RTS	Ready To Send
RI	Ring Indicator
RIL	Radio Interface Layer
SCA	Service Center Address
SIM	Subscriber Identity Module
SMD	Surface Mounted Device
SMS	Short Message Service
SMSC	Short Message Service Center
SS	Supplementary Service
TIA	Telecommunications Industry Association
UDUB	User Determined User Busy
USSD	Unstructured Supplementary Service Data

